

SO-QSFP-LX4

QSFP, 40GBase-LR, CWDM, SM, DDM, 4.5dB, 2km@SM, 100m@OM3

OVERVIEW

The SO-QSFP-LX4 is a transceiver module designed for applications over both multimode (MM) and singlemode (SM) fiber with transmission distances of up to 100m on MM fiber (OM3) and 2km on SM fiber. The module converts 4 inputs channels of 10Gbps electrical data to 4 CWDM optical signals, and multiplexes them into a single channel for 40Gbps optical transmission. Reverseely, on the receiver side, the module optically de-multiplexes a 40Gbps input into 4 CWDM channels signals, and converts them to 4 channel output electrical data.

The central wavelengths of the 4 CWDM channels are 1271, 1291, 1311 and 1331 nm as members of the CWDM wavelength grid defined in ITU-T G694.2. It contains a duplex LC connector for the optical interface and a 148-pin connector for the electrical interface. The product is designed with form factor, optical/electrical connection and digital diagnostic interface according to the QSFP+ Multi-Source Agreement (MSA) SFF-8436. It has been designed to meet the harshest external operating conditions including temperature, humidity and EMI interference.

PRODUCT FEATURES

- LC duplex connector
- 4 CWDM lanes MUX/DEMUX design
- Up to 11.2Gb/s data rate per wavelength
- QSFP+ MSA compliant
- IEEE 802.3ba Electrical Interface
- Digital diagnostic capabilities
- Compliant with QDR/DDR Infiniband data rates
- Up to 100m transmission on OM3 multimode fiber (MM)
or 2km transmission on single mode (SM) fiber
- Power Dissipation < 3.5W
- Operating Case Temperature
Standard: 0°C to +70°C

APPLICATIONS

- 40GBASE-LX4 Ethernet Links
- Infiniband QDR and DDR interconnects

ORDERING INFORMATION

Part Number	Description
SO-QSFP-LX4	QSFP, 40GBase-LR, CWDM, SM, DDM, 4.5dB, 2km@SM, 100m@OM3

Subject to change without notice.

For more information, visit smaroptics.com.

FUNCTIONAL DIAGRAM

This product converts the 4-channel 10Gbps electrical input data into CWDM optical signals, using an array with 4-wavelength Distributed Feedback Lasers (DFB). The CWDM light signals are combined by an optical MUX to a 40Gbps data stream. The connector interface towards the MM or SM fiber is a LC connector. The receiver part accepts the 40Gbps CWDM optical signals and de-multiplexes them into 4 individual 10Gbps channels with different wavelength. Each wavelength is received by a photo diode (PIN) and converted into an electrical signal using a TIA. Figure 1 shows the functional block diagram of this product.

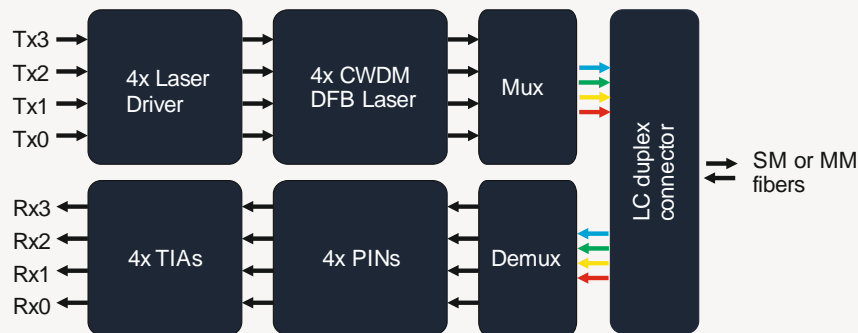


Figure 1. Functional diagram

A single +3.3V power supply is required and both power supply pins VccTx and VccRx are internally connected and should be applied concurrently. As per MSA specifications the module offers 7 low speed hardware control pins (including the 2-wire serial interface): ModSelL, SCL, SDA, ResetL, LPMode, ModPrsL and IntL.

Module Select (ModSelL) is an input pin. When held low by the host, this product responds to 2-wire serial communication commands. The ModSelL allows the use of this product on a single 2-wire interface bus – individual ModSelL lines must be used. Serial Clock (SCL) and Serial Data (SDA) are required for the 2-wire serial bus communication interface and enable the host to access the QSFP+ memory map.

The ResetL pin enables a complete reset, returning the settings to their default state, when a low level on the ResetL pin is held for longer than the minimum pulse length. During the execution of a reset the host shall disregard all status bits until it indicates a completion of the reset interrupt. The product indicates this by posting an IntL (Interrupt) signal with the Data_Not_Ready bit negated in the memory map. Note that on power up (including hot insertion) the module should post this completion of reset interrupt without requiring a reset.

Low Power Mode (LPMode) pin is used to set the maximum power consumption for the product in order to protect hosts that are not capable of cooling higher power modules, should such modules be accidentally inserted.

Module Present (ModPrsL) is a signal local to the host board which, in the absence of a product, is normally pulled up to the host Vcc. When the product is inserted into the connector, it completes the path to ground through a resistor on the host board and asserts the signal. ModPrsL then indicates its present by setting ModPrsL to a “Low” state.

Interrupt (IntL) is an output pin. “Low” indicates a possible operational fault or a status critical to the host system. The host identifies the source of the interrupt using the 2-wire serial interface. The IntL pin is an open collector output and must be pulled to the Host Vcc voltage on the Host board.


ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T_s	-40	+85	°C
Supply Voltage	V_{cc}	-0.5	3.6	V
Input Voltage	V_{IN}	-0.5	V_{cc}	V
Damage Threshold, each Lane	THd	3.3	-	dBm

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T_c	0		70	°C
Power Supply Voltage	V_{cc}	3.135	3.3	3.465	V
Baud rate			10.3125	11.2	Gbps
Link Distance (OM3 MM fiber)				100	m
Link Distance (SM fiber)				2	km

RECOMMENDED POWER SUPPLY FILTER

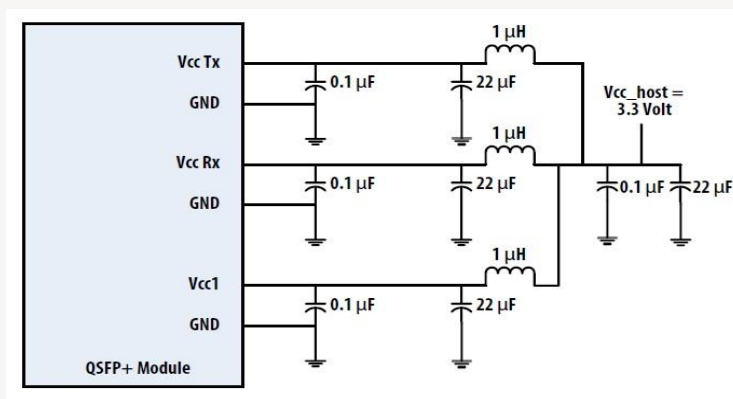

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Power Consumption		0		3.5	W
Supply Current	I_{cc}			1.1	A
Transceiver Power-on Initialization Time (Note 1)				2000	msec

ELECTRICAL CHARACTERISTICS – TRANSMITTER (EACH LANE)

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Single-ended Input Voltage Tolerance (Note 2)		-0.3		4.0	V	Referred to TP1 signal common
AC Common Mode Input Voltage Tolerance (RMS)		15			mV	
Differential Input Voltage Swing Threshold		50			mV	
Differential Input Voltage Swing	$V_{in,pp}$	190		700	mV _{pp}	
Differential Input Impedance	Z_{in}	90	100	112	Ohm	
Differential Input Return Loss		See IEEE 802.3ba 86A.4.1.1			dB	10MHz - 11.1GHz
J2 Jitter Tolerance	J_{j2}	0.17			UI	
J9 Jitter Tolerance	J_{j9}	0.29			UI	
Data Dependent Pulse Width Shrinkage (DDPWS) Tolerance		0.07			UI	
Eye Mask Coordinates {X1, X2, Y1, Y2}		0.11, 0.31			UI	
		95, 350			mV	

ELECTRICAL CHARACTERISTICS – RECEIVER (EACH LANE)

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Single-ended Output Voltage Threshold		-0.3		4.0	V	Referred to signal common
AC Common Mode Output Voltage Tolerance (RMS)				7.5	mV	
Differential Output Voltage Swing Threshold	$V_{out,pp}$	300		850	mV _{pp}	
Differential Output Impedance	A_{out}	90	100	110	Ohm	
Termination Mismatch at 1MHz				5	%	
Differential Output Return Loss		See IEEE 802.3ba 86A.4.2.1			dB	10MHz - 11.1GHz
Common mode Output Return Loss		See IEEE 802.3ba 86A.4.2.2			dB	10MHz - 11.1GHz
Output Transition Time		28			psec	20% to 80%
J2 Jitter Tolerance	J_{o2}			0.42	UI	
J9 Jitter Tolerance	J_{o9}			0.65	UI	
Eye Mask Coordinates {X1, X2, Y1, Y2}		0.29, 05			UI	Hit Ratio = 5×10^{-5}
		150, 425			mV	

Notes:

- Power-on initialization time is the time from when the power supply voltages reach and remain above the minimum recommended operating supply voltages to the time when the module is fully functional.
- The single ended input voltage tolerance is the allowable range of the instantaneous input signals.

OPTICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Wavelength Assignment	λ_0	1264.5	1271	1277.5	nm
	λ_1	1284.5	1291	1297.5	nm
	λ_2	1304.5	1311	1317.5	nm
	λ_3	1324.5	1331	1337.5	nm

OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Total Average Launch Power	P_T	-1		5.5	dBm	
Average Launch Power (each Lane)	P_{AVG}	-7.0		-0.5	dBm	
Optical Modulation Amplitude (OMA) (each Lane)	P_{OMA}	-5.5		1.5	dBm	
Difference in P_{OMA} between any 2 Lanes (OMA)	$P_{tx,diff}$			6.5	dB	
Extinction Ratio	ER	3.5			dB	
Relative Intensity Noise	RIN			-128	dB/Hz	12dB reflection
Transmitter Reflectance	R_T			-12	dB	
Transmitter Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3}		{0.23, 0.34, 0.43, 0.27, 0.35, 0.4}				
Average Launch Power OFF (each Lane)	P_{off}			-30	dBm	

Note: Transmitter optical characteristics are measured with a single mode fiber.

OPTICAL CHARACTERISTICS – RECEIVER

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Total Average Receive Power				5.5	dBm	
Average Receive Power (each Lane)		-11.5		-0.5	dBm	
Receiver Reflectance	R_R			-26	dB	
Receive Power (OMA) (each Lane)				1.5	dBm	
Receiver Sensitivity in OMA (each Lane)	SEN			-10.6	dBm	
Difference in Receive Power between any 2 Lanes (OMA)	$P_{RX,diff}$			7.5	dB	
LOS Assert	LOS_A	-28			dBm	
LOS Deassert	LOS_D			-15	dBm	
LOS Hysteresis	LOS_H	0.5			dB	
Receiver Electrical 3dB upper cut-off Frequency (each Lane)	F_c			12.3	GHz	

Note: Receiver optical characteristics are measured with a multimode fiber.

DIGITAL DIAGNOSTIC FUNCTIONS


The following digital diagnostic characteristics are defined over the normal operating conditions unless otherwise specified.

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Temperature monitor absolute error	DMI_{TEMP}	-3		3	deg. C	operating temperature
Supply voltage monitor absolute error	DMI_{VCC}	-0.1		0.1	V	Full operating range
Channel RX power monitor absolute error	DMI_{RX_CH}	-2		2	dB	1
Channel Bias current monitor	DMI_{bias_CH}	-10%		10%	mA	
Channel TX power monitor absolute error	DMI_{TX_CH}	-2		2	dB	1

Note 1: Due to measurement accuracy of different multi-mode fibers, there could be an additional ± 1 dB fluctuation, or ± 3 dB total accuracy.

MODE-CONDITIONING PATCH CABLE

For applications over OM1 and OM2 MM fiber, a patch cord with mode conditioning based on offset launch is required. In a typical installation, the patch cord is inserted between an optical transceiver module and the MM fiber cable plant as illustrated in Figure 2.

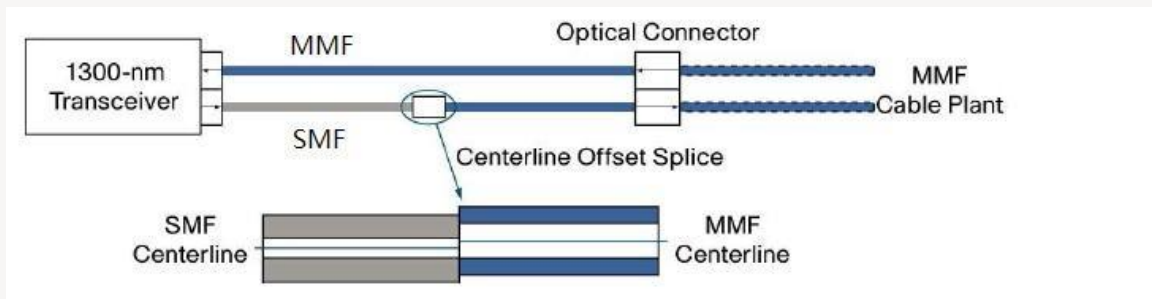

OPTICAL AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
50 / 125 um MMF			300		m
Data Rate			10.3125		Gbps

OPTICAL AND ELECTRICAL CHARACTERISTICS TRANSMITTER


Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	λ_c	840	850	860	nm
Spectral Width (RMS)	$\Delta\lambda$			0.45	nm
Average Output Power	P_{out}	-6		-1	dBm
Extinction Ratio	Er	3.0	5.0		dB
Output Optical Eye		IEEE 802.3-2005 Compliant			
Transmitter Dispersion Penalty	TDP			3.9	dB
Input Differential Impedance	Z_{IN}	90	100	110	Ω
TX_Disable Assert Time	t_{off}			10	us
TX_DISABLE Negate Time	t_{on}	-	-	1	ms
TX_BISABLE time to start reset	t_{reset}	10	-	-	us
Time to initialize, include reset of TX_FAULT	t_{init}	-	-	300	ms
TX_FAULT from fault to assertion	t_{fault}	-	-	100	us
Total Jitter	TJ	-	-	0.28	UI(p-p)
Data Dependant Jitter	DDJ	-	-	0.1	UI(p-p)
Uncorrelated Jitter	UJ	-	-	0.023	RMS

OPTICAL AND ELECTRICAL CHARACTERISTICS RECEIVER

Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	λ_c	840	850	860	nm
Receiver Sensitivity	P_{min}			-11.1	dBm
Output Differential Impedance	R_{IV}	90	100	110	Ω
Receiver Overload2	P_{max}	-1			dBm
Optical Return Loss	ORL			-12	dB
LOS De-Assert	$LOSD$			-12.5	dBm
LOS Assert	$LOSA$	25			dBm
LOS Hysteresis		0.5			dB
LOS	High	2.0		VCC+0.3	V
	Low	0		0.8	

PIN ASSIGNMENT AND FUNCTION DEFINITIONS

PIN Assignment

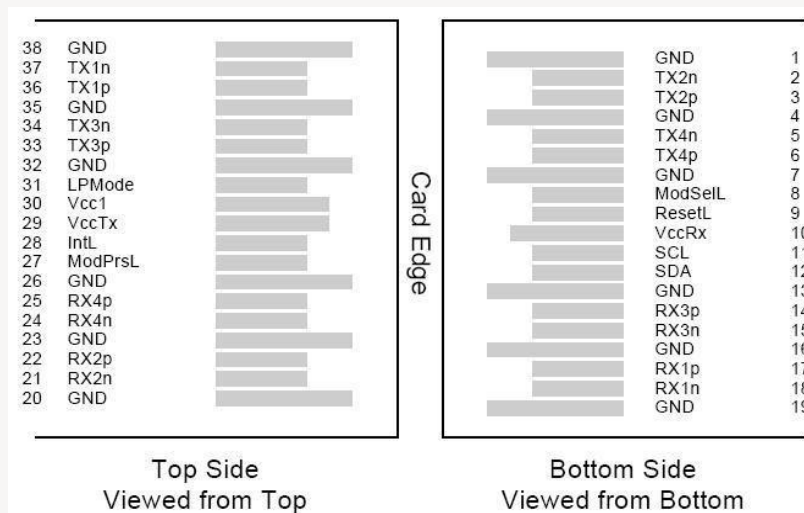

PIN Definition

PIN	Signal Name	Description	PIN	Signal Name	Description
1	GND	Ground (1)	20	GND	Ground (1)
2	Tx2n	CML-I Transmitter 2 Inverted Data Input	21	Rx2n	CML-O Receiver 2 Inverted Data Output
3	Tx2p	CML-I Transmitter 2 Non-Inverted Data Input	22	Rx2p	CML-O Receiver 2 Non-Inverted Data Output
4	GND	Ground (1)	23	GND	Ground (1)
5	Tx4n	CML-I Transmitter 4 Inverted Data Input	24	Rx4n	CML-O Receiver 4 Inverted Data Output
6	Tx4p	CML-I Transmitter 4 Non-Inverted Data Input	25	Rx4p	CML-O Receiver 4 Non-Inverted Data Output
7	GND	Ground (1)	26	GND	Ground (1)
8	ModSelL	LVTTLL-I Module Select	27	ModPrsL	Module Present
9	ResetL	LVTTLL-I Module Reset	28	IntL	Interrupt
10	VccRx	+3.3V Power Supply Receiver (2)	29	VccTx	+3.3V Power Supply Transmitter (2)
11	SCL	LVCMOS-I/O 2-Wire Serial Interface Clock	30	Vcc1	+3.3V Power Supply
12	SDA	LVCMOS-I/O 2-Wire Serial Interface Data	31	LPMODE	LVTTLL-I Low Power Mode
13	GND	Ground (1)	32	GND	Ground (1)
14	Rx3p	CML-O Receiver 3 Non-Inverted Data Output	33	Tx3p	CML-I Transmitter 3 Non-Inverted Data Input
15	Rx3n	CML-O Receiver 3 Inverted Data Output	34	Tx3n	CML-I Transmitter 3 Inverted Data Input
16	GND	Ground (1)	35	GND	Ground (1)
17	Rx1p	CML-O Receiver 1 Non-Inverted Data Output	36	Tx1p	CML-I Transmitter 1 Non-Inverted Data Input
18	Rx1n	CML-O Receiver 1 Inverted Data Output	37	Tx1n	CML-I Transmitter 1 Inverted Data Input
19	GND	Ground (1)	38	GND	Ground (1)

Notes:

1. All Ground (GND) are common within the QSFP+ module and all module voltages are referenced to this potential unless noted otherwise. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1 and VccTx are the receiving and transmission power suppliers and shall be applied concurrently. The connector pins are each rated for a maximum current of 500mA.

MECHANICAL DRAWING

Subject to change without notice.

For more information, visit smaroptics.com.

