

10 Gb/s XENPAK LX4 Transceiver

INTRODUCTION

The SO-XENPAK-LX4 is a highly integrated, serial optical transceiver module for high-speed, 10Gbit/s data transmission applications. The module is fully compliant to IEEE 802.3ae standard for Ethernet making it ideally suited for 10 GbE applications. The modules operate at CWDM wavelengths and is designed for distances of up to 300 m. The transceiver module comprises four DFB CWDM laser transmitter, four receivers with a PIN photodiode, an optical CWDM MUX/DEMUX, a XAUI-Attachment Interface, an integrated Coder / Decoder and multiplexer / demultiplexer (SERDES: Serializer / Deserializer). The transceiver operates within a wide temperature range of 0°C to +70°C and offers optimum heat dissipation and excellent electromagnetic shielding. A 70 pin electrical connector and a duplex SC connector optical interface assure the XENPAK MSA compliant connectivity.

APPLICATIONS



- IEEE 802.3ae 10GBASE-ER 10.3125 Gb/s
- Inter and Intra Campus
- Data Centers

FEATURES

- Compliant to IEEE 802.3ae 10GBASE-ER at 10.3125 Gbit/s
- Up to 300 m transmission on 62.5/125 μm MMF
- 7.5 dB link budget
- Laser Class 1 compliant
- Hot-Pluggable 70 pin connector with XAUI interface
- Alarms, controls and performance monitoring
- DFB laser
- Duplex SC-connector interface
- Compliant with the EU RoHS 6 Environmental Requirements

LASER SAFETY

This optical transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module need to be terminated with an optical connector or with a dust plug.

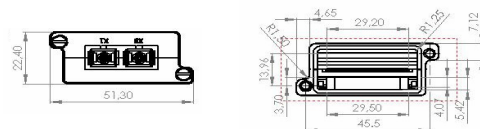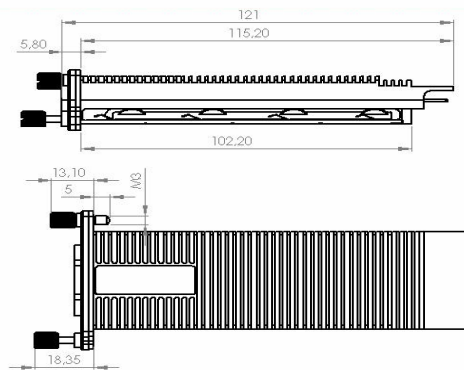

Specification subject to change without notice.

Ordering Information:

Part no:	Description/Application
SO-XENPAK-LX4	10 GBASE-LX4 10.3125 Gb/s transceiver operates CWDM for up to 300 m

Optical Parameters:

Part no.\Parameter	Wavelength [nm]	Opt. Output Power [dBm]	Opt. Receiver Sensitivity [dBm]	Power Budget [dB]
SO-XENPAK-LX4	1275 nm 1300 nm 1325 nm 1349 nm	-6.75 to -0.5	-14.25 to -0.5	7.5 dB