

10 Gb/s XFP 1550 nm Transceiver

INTRODUCTION


The SO-XFP-ZR is an optical transceiver module for high-speed, 10Gbit/s data transmission applications. The module is fully compliant to IEEE 802.3ae standard for Ethernet and the 10GFC Rev. 4 Fiber Channel standard, making it ideally suited for 10 GbE telecom, datacom and storage area network (SAN / NAS). Designed for distances of up to 80km the transceiver module comprises a DFB transmitter with an externally modulated laser (DFB-EA) and a receiver with an APD photodiode. The transceiver operates within a wide temperature range of 0°C to +70°C and offers optimum heat dissipation and excellent electromagnetic shielding. The transceiver is fully compliant to the XFP MSA Rev. 4.5.

APPLICATIONS

- IEEE 802.3ae 10GBASE-ZR 10.3125 Gb/s
- Regional Networking
- Core Networks

FEATURES

- Compatible with XFP MSA Rev. 4.5
- Compliant to IEEE 802.3ae 10GBASE-ER at 10.3125 Gbit/s
- Up to 80 km transmission on 9/125 μm SMF G.652
- 23 dB link budget
- Hot pluggable 30 pin connector
- 1550 nm laser
- Duplex LC-connector interface
- Compliant with the EU RoHS 6 Environmental Requirements

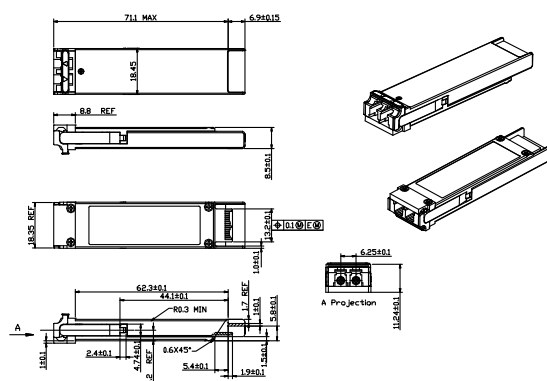

Specification subject to change without notice.

LASER SAFETY

This optical transceiver is a Class 1M laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Ordering Information:

Part no:	Description/Application
SO-XFP-ZR	10 GBASE-ZR 10.3125 Gb/s transceiver operates at 1550 nm wavelength for up to 80 km

Optical Parameters:

Part no.\Parameter	Wavelength [nm]	Opt. Output Power [dBm]	Opt. Receiver Sensitivity [dBm]	Power Budget [dB]
SO-XFP-ZR	1550	-1 to +4	-24 to -7	23 dB

** When shorter distances of optical fiber are used an attenuator must be used to avoid overloading and damaging of the optical APD receiver.

Specification subject to change without notice.