

SO-QSFP28-ZR4

QSFP28, 100G Ethernet ZR4, SM 1296/1300/1305/1309nm, 80km, 31dB, LC

OVERVIEW

The SO-QSFP28-ZR4 is a QSFP28 form-factor transceiver for 100 Gbps Ethernet applications. It is intended for use in interconnect applications between data centers between switches, routers, storage equipment etc.

SO-QSFP28-ZR4 has an optical performance enabling distances of up to 80km over a SingleMode (SM) G.652 fiber-pair cable. Forward Error Correction (FEC) is required to be implemented by the host in order to ensure reliable system operation. The FEC type shall be as defined in IEEE802.3bj, i.e. Reed Solomon RS(528,514). The optical parameters will provide a bit error ratio (BER) of 5×10^{-5} . FEC will render in the required BER of better than 1×10^{-12} .

SO-QSFP28-ZR4 uses four LANWDM channels/lanes @ 25.78 Gbps to transport the Ethernet signal. Digital diagnostics functions (DDM) are available via an I2C interface, as specified by the QSFP28 MSA.

TECHNICAL DATA

Parameter	Value
Technology	Grey QSFP28
Transmission media	SM (2x LC)
Typical reach	80km
Nominal wavelengths	1295.56 nm 1300.05 nm 1304.58 nm 1309.14 nm
Interface standards	100GBASE-ZR4
Bit rate support	103.12 Gbps ¹⁾ 25.78 Gbps ²⁾
Protocol support	100GbE
Power budget	2.5 – 31.0 dB
Dispersion penalty	1.0 dB
Power consumption	< 5.5W
Operating temperature	0°C to +70°C
Storage temperature	-40°C to +85°C

¹⁾ Aggregated line rate 100GbE

²⁾ Line rate per 25.78Gbps lane

³⁾ Average power, per lane


⁴⁾ Per 25.78Gbps lane. Measured with PRBS31 (2³¹-1) @ BER 5E-5

Safety/regulatory compliance:

TUV/UL/FDA (contact Smartoptics for latest certification information)

RoHS compliance

Parameter	Value
Transmitter data:	
Output power, total	Max: +13.0 dBm
Diff in power betw lanes	Max: 3.6 dB
Output power, per lane	Min: +2.0 dBm ³⁾ Max: +7.0 dBm ³⁾
Transmit wavelengths	1294.53 - 1296.59 nm 1299.02 - 1301.09 nm 1303.54 - 1305.63 nm 1308.09 - 1310.19 nm
Receiver data:	
Minimum input power	-29.0 dBm ^{3) 4)}
Overload (max power)	+4.5 dBm ^{3) 4)}
Wavelength range	1294.53 - 1296.59 nm 1299.02 - 1301.09 nm 1303.54 - 1305.63 nm 1308.09 - 1310.19 nm
DDM	Yes
MSA compliance	QSFP28 MSA SFF-8636

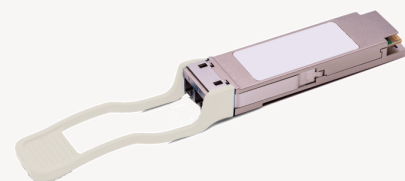

ORDERING INFORMATION

Ordering number	Description
SO-QSFP28-ZR4	QSFP28, 100G Ethernet ZR4, SM 1296/1300/1305/1309nm, 80km, 31dB, LC

GENERAL DEFINITIONS

Technology:	Grey; Transceiver type for non-WDM applications. Electrical or optical. CWDM; Transceiver type for CWDM applications using G.694.2 channel grid. DWDM; Transceiver type for DWDM applications using G.694.1 channel grid. BiDi; Transceiver pair using two different wavelength channels operating on a single-fiber. DAC: Direct Attach Cable (DAC). Electrical or optical cable with attached connectors.
Transmission Media:	Type of fiber, e.g. Multimode (MM) or Singlemode (SM). Number of and connector type within brackets (e.g. 2x LC, 1x MPO).
Typical reach:	Nominal distance performance based on dispersion and power budget properties, i.e. w/o dispersion compensation and optical amplification.
Bit rate range:	Supported bit rate range in Gigabit or Megabit per second (Gbps or Mbps).
Protocols:	Protocols within supported bit rate range.
Nominal wavelength:	Typical wavelength from transmitter.
Interface standards:	Referenced interface standards e.g. IEEE 802.3 standard for 10GbE services.
Power budget:	Min and max power budget between Transmitter and Receiver.
Dispersion tolerance/penalty:	Maximum amount of tolerated dispersion and required reduction of power budget to maintain stipulated Bit Error Rate (BER) and at a given bit rate.
Temperature range:	Max operating case temperature range. Commercial temperature range (C-temp): 0°C to +70°C (32°F to +158°F) Extended temperature range (E-temp): typically -20°C to +75°C (-4°F to +167°F) Industrial temperature range (I-temp): -40°C to +85°C (-40°F to +185°F)
Power consumption:	Worst case power consumption. Will vary over temperature.
Transmitter Output power:	Average output power. Provided in min and max values.
Receiver minimum input power:	Minimum average input power at specified BER, normally $1E^{-12}$.
Receiver max input power:	Maximum average input power giving a BER, normally $1E^{-12}$.
DDM:	Digital Diagnostic Monitoring functionality as defined in SFF-8472 MSA.

Smartoptics makes no warranties or representations, expressed or implied, of any kind relative to the information or any portion thereof contained in this document or its adaptation or use, and assumes no responsibility or liability of any kind, including, but not limited to, indirect, special, consequential or incidental damages, for any errors or inaccuracies contained in the information or arising from the adaptation or use of the information or any portion thereof. The information in this document is subject to change without notice.