

# SO-SFP-GE-FE-BX20D-53

SFP BIDI, 100Mbps FE, TX/RX=1550/1310nm, SM, DDM, 17dB, 20km, LC, SGMII

## OVERVIEW

The SO-SFP-GE-FE-BX20D-53 series is small form factor pluggable module for single-mode fiber 100BASE-FX application, with a build-in PHY device supporting SGMII interface and an integrated build-in high performance MCU. Host equipment can more easily configure all functions for this module via the I<sup>2</sup>C interface. It is with the SFP 20-pin connector to allow hot plug capability.

The transmitter section uses a multiple quantum well 1310nm/1550nm laser and is a class 1 laser compliant according to International Safety Standard IEC 60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC. The SO-SFP-GE-FE-BX20D-35 series are designed to be compliant with SFF-8472.

## PRODUCT FEATURES

- Support 100Base-X data links
- A type: 1550nm FP TX / 1310nm RX
- 20km with 9/125 μm SMF
- Single 3.3V power supply and TTL logic interface
- Hot-Pluggable SFP footprint simplex LC connector interface
- Class 1 FDA and IEC60825-1 laser safety compliant
- Operating case temperature
  - Standard: 0°C ~ +70°C
  - Industrial: -40°C ~ +85°C
- Compliant with SFP MSA specification
- Compliant with SFF-8472 MSA

## APPLICATIONS

- SONET OC-3 / SDH STM-1
- WDM fast Ethernet links
- Other optical links

## ORDERING INFORMATION

Part Number	Description
SO-SFP-GE-FE-BX20D-53	SFP BIDI, 100Mbps FE, TX/RX=1550/1310nm, SM, DDM, 17dB, 20km, LC, SGMII
SO-SFP-GE-FE-BX20D-53-I	SFP BIDI, 100Mbps FE, TX/RX=1550/1310nm, SM, DDM, 17dB, 20km, LC, SGMII, ind. temp

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Storage Temperature	TS	-40	+85	°C
Supply Voltage	VCC	-0.5	3.6	V
Operating Relative Humidity			95	%

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Case Operating Temperature	TA	SO-SFP-GE-FE-BX20D-53		+70	°C
		SO-SFP-GE-FE-BX20D-53-I	-40	+85	
Power Supply Voltage	Vcc	3.15	3.3	3.45	V
Power Supply Current	Icc			300	mA
Data rate	OC-3		155		Mbps
		100M	100		

## PERFORMANCE SPECIFICATIONS – ELECTRICAL TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Unit	Notes
LVPECL Compatible Inputs(Differential)	V <sub>IN</sub>	400		2000	mVpp	AC coupled inputs
Input Impedance (Differential)	Z <sub>IN</sub>	85	100	115	ohms	R <sub>in</sub> > 100 kohms @ DC
TX Disable	Disable	2		Vcc	V	
	Enable	0		0.8		
TX FAULT	Fault	2		Vcc+0.3	V	
	Normal	0		0.5		

## PERFORMANCE SPECIFICATIONS – ELECTRICAL RECEIVER

Parameter	Symbol	Min	Typ	Max	Unit	Notes
LVPECL Outputs (Differential)	V <sub>out</sub>	400		2000	mVpp	AC coupled outputs
Output Impedance (Differential)	Z <sub>out</sub>	85	100	115	ohms	
Rx_LOS Output Voltage – High		2		Vcc+0.3	V	
Rx_LOS Output Voltage – Low		0		0.8	V	
MOD_DEF ( 2:0 )	VoH	2.5			V	With Serial ID
	VoL	0		0.5	V	

## OPTICAL AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
9µm Core Diameter MMF	L		20		km
Data Rate			125		Mbps

## OPTICAL AND ELECTRICAL CHARACTERISTICS TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	$\lambda_c$	1500	1550	1600	nm
Spectral Width (RMS)	$\Delta\lambda$			3	nm
Average Output Power	$P_{out}$	-15		-8	dBm
Extinction Ratio	ER	9			dB
Rise/Fall Time(20%~80%)	$t_r/t_f$			3	ps
Output Optical Eye		IUT-T G.957 Compliant			
TX Disable Assert Time	$t_{off}$			10	us
Pout@TX Disable Asserted	$P_{out}$			-45	dBm


## OPTICAL AND ELECTRICAL CHARACTERISTICS RECEIVER

Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	$\lambda$	1260	1310	1360	nm
Receiver Sensitivity	$P_{min}$			-32	dBm
Receiver Overload	$P_{max}$	-8			dBm
LOS De-Assert	LOSD			-33	dBm
LOS Assert	LOSA	-45			dBm
LOS Hysteresis		0.5			dB

## PIN ASSIGNMENT ACCORDING TO MSA

PIN	Signal Name	Description	PIN	Signal Name	Description
1	V <sub>EE</sub> T	Transmitter Signal Ground	11	V <sub>EE</sub> R	Receiver Signal Ground
2	TX_Fault	Transmitter Fault Indication. Logic "1" Output = Laser Fault. Logic "0" Output = Normal Operation	12	RD-	Inverse Receiver Data Out
3	TX_Disable	Logic "1" Input (or no connection) = Laser off, Logic "0" = Laser on.	13	RD+	Receiver Data Out
4	SDA	Modulation Definition 2 – Two wires serial ID Interface	14	V <sub>EE</sub> R	Receiver Signal Ground
5	SDL	Modulation Definition 1 – Two wires serial ID Interface	15	V <sub>CC</sub> R	Receiver Power – 3.3V±5%
6	MOD-ABS	Modulation Definition 0 – Ground in Module	16	V <sub>CC</sub> T	Transmitter Power – 3.3V±5%
7	RS0	RX Rate Select (LVTTTL). This pin has an internal 30k pull-down to ground. A signal on this pin will not affect module performance.	17	V <sub>EE</sub> T	Transmitter Signal Ground
8	RX_LOS	Loss of Signal Out (OC).	18	TD+	Transmitter Data In
9	RS1	TX Rate Select (LVTTTL). This pin has an internal 30k pull-down to ground. A signal on this pin will not affect module performance.	19	TD-	Inverse Transmitter Data In
10	V <sub>EE</sub> R	Receiver Signal Ground	20	V <sub>EE</sub> T	Transmitter Signal Ground

## MECHANICAL DIMENSIONS

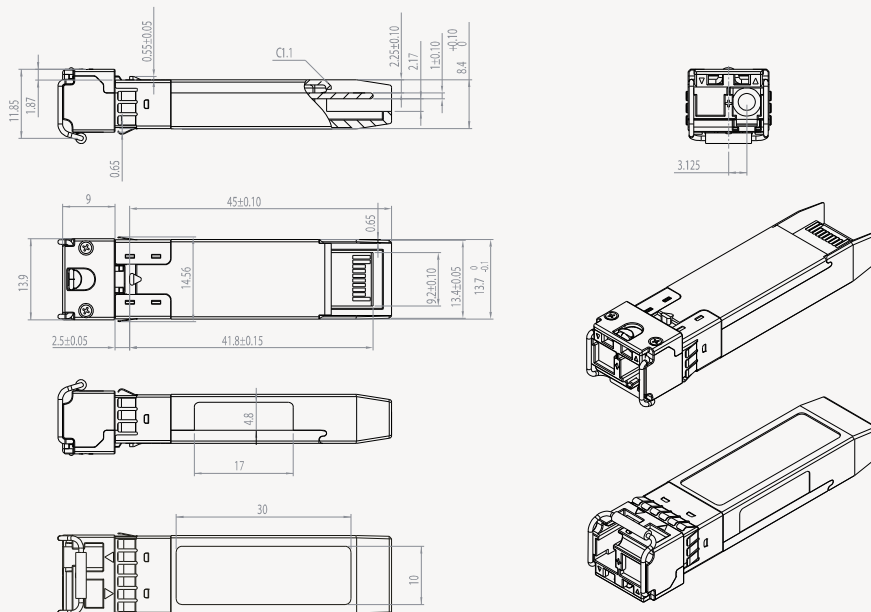

Subject to change without notice.

For more information, visit [smaroptics.com](http://smaroptics.com).