

SO-SFP-MR120D-50G-Dxxxx

SFP, 100Mbps-2.7Gbps, Multirate, DWDM 50GHz, SM, DDM, 33dB, 120km

OVERVIEW

The SO-SFP-MR120D-50G-Dxxxx series single mode transceiver is small form factor pluggable module for duplex optical data communications. This module is designed for single mode fiber and operates at a nominal DWDM wavelength from 1529.94nm to 1561.42nm as specified by the ITU-T. It is designed to deploy in the DWDM networking equipment in metropolitan access and core networks. It is with the SFP 20-pin connector to allow hot plug capability. The transmitter section uses a DWDM multiple quantum well DFB laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The SO-SFP-MR120D-80G-Dxxxx series are designed to be compliant with SFF-8472 Multi-Source Agreement (MSA).

PRODUCT FEATURES

- Operating data rate up to 2.67Gbps
- Available in all C-Band and L-Band Wavelengths on the 100GHz DWDM ITU Grid
- Single 3.3V power supply and TTL logic interface
- Hot-Pluggable SFP footprint duplex LC connector interface
- Compliant with Class 1 FDA and IEC60825-1 laser safety
- Compliant with SFP MSA
- Compliant with SFF-8472
- Operating case temperature:
 - 0°C to 70°C standard
 - 5°C to 70°C extended

APPLICATIONS

- Sonet / SDH
- Ethernet / Fibre Channel
- DWDM, SAN, WAN networking
- Equipment connectivity

ORDERING INFORMATION

Part Number	Description
SO-SFP-MR120D-50G-Dxxxx	SFP, 100Mbps-2.7Gbps, Multirate, DWDM 50GHz, SM, DDM, 33dB, 120km
SO-SFP-MR120D-50G-Dxxxx-E	SFP, 100Mbps-2.7Gbps, Multirate, DWDM 50GHz, SM, DDM, 33dB, 120km, Ext. Temp

Subject to change without notice.

For more information, visit smartoptics.com.

smartoptics

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Storage Temperature	TS	-40	+85	°C
Supply Voltage	VCC	-0.5	3.6	V
Operating Relative Humidity			95	%

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Case Operating Temperature	SO-SFP-MR120D-50G-DXXXX	0		+70	°C
	Tc SO-SFP-MR120D-50G-DXXXX	-5		+70	
	-E				
Power Supply Voltage	Vcc	3.15	3.3	3.45	V
Power Supply Current	Icc			450	mA
Power dissipation	PW			1.5	W
Data rate	OC-48/STM-16 FEC		2.67		Gbps
	OC-48/STM-16		2.488		
	2FC		2.125		
	GBE		1.25		
	FC		1.063		

PERFORMANCE SPECIFICATIONS – ELECTRICAL TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Unit	Notes
CML Inputs(Differential)	V _{IN}	400		1600	mVpp	AC coupled inputs
Input Impedance (Differential)	Z _{IN}	85	100	115	ohms	R _{in} > 100 kohms @ DC
TX Disable	Disable	2		Vcc	V	
	Enable	0		0.8		
TX FAULT	Fault	2		Vcc	V	
	Normal	0		0.8		

PERFORMANCE SPECIFICATIONS – ELECTRICAL RECEIVER

Parameter	Symbol	Min	Typ	Max	Unit	Notes
CML Outputs (Differential)	V _{out}	400	800	1200	mVpp	AC coupled outputs
Output Impedance (Differential)	Z _{out}	85	100	115	ohms	
Rx_LOS Output Voltage – High		2		Vcc	V	
Rx_LOS Output Voltage – Low		0		0.8	V	
MOD_DEF (2:0)	VoH	2.5			V	With Serial ID
	VoL	0		0.8	V	

PERFORMANCE SPECIFICATIONS – OPTICAL

Parameter	Symbol	Min	Typ	Max	Unit
Data Rate			2.5G		Gbps


Subject to change without notice.

For more information, visit smaroptics.com.

PIN ASSIGNMENT ACCORDING TO MSA

PIN	Signal Name	Description	PIN	Signal Name	Description
1	V _{EE} T	Transmitter Signal Ground	11	V _{EE} R	Receiver Signal Ground
2	TX_Fault	Transmitter Fault Indication. Logic "1" Output = Laser Fault. Logic "0" Output = Normal Operation	12	RD-	Inverse Receiver Data Out
3	TX_Disable	Logic "1" Input (or no connection) = Laser off, Logic "0" = Laser on.	13	RD+	Receiver Data Out
4	SDA	Modulation Definition 2 – Two wires serial ID Interface	14	V _{EE} R	Receiver Signal Ground
5	SDL	Modulation Definition 1 – Two wires serial ID Interface	15	V _{CC} R	Receiver Power – 3.3V±5%
6	MOD-ABS	Modulation Definition 0 – Ground in Module	16	V _{CC} T	Transmitter Power – 3.3V±5%
7	RS0	RX Rate Select (LVTTTL). This pin has an internal 30k pull-down to ground. A signal on this pin will not affect module performance.	17	V _{EE} T	Transmitter Signal Ground
8	RX_LOS	Loss of Signal Out (OC).	18	TD+	Transmitter Data In
9	RS1	TX Rate Select (LVTTTL). This pin has an internal 30k pull-down to ground. A signal on this pin will not affect module performance.	19	TD-	Inverse Transmitter Data In
10	V _{EE} R	Receiver Signal Ground	20	V _{EE} T	Transmitter Signal Ground

MECHANICAL DIMENSIONS

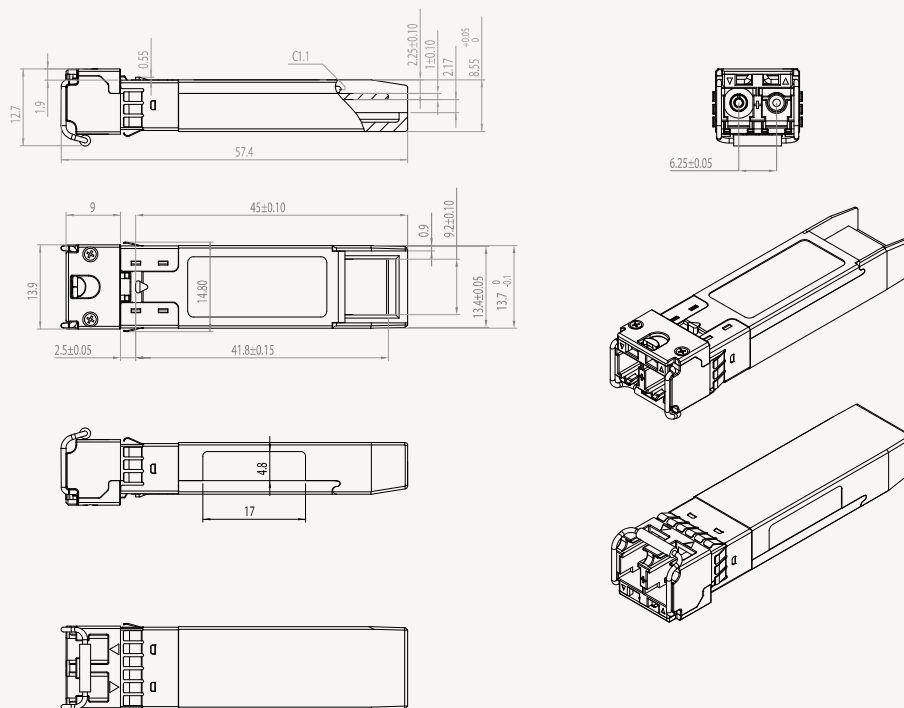

Subject to change without notice.

For more information, visit smartoptics.com.

EXTENDED ORDERING INFORMATION

Part Number	ITU channel no.	Frequency [THz]	Center Wavelength (nm)
SO-SFP-MR120D-50G-D9200	20.0	192.00	1561.42
SO-SFP-MR120D-50G-D9205	20.5	192.05	1561.01
SO-SFP-MR120D-50G-D9210	21.0	192.10	1560.61
SO-SFP-MR120D-50G-D9215	21.5	192.15	1560.20
SO-SFP-MR120D-50G-D9220	22.0	192.20	1559.79
SO-SFP-MR120D-50G-D9225	22.5	192.25	1559.39
SO-SFP-MR120D-50G-D9230	23.0	192.30	1558.98
SO-SFP-MR120D-50G-D9235	23.5	192.35	1558.58
SO-SFP-MR120D-50G-D9240	24.0	192.40	1558.17
SO-SFP-MR120D-50G-D9245	24.5	192.45	1557.77
SO-SFP-MR120D-50G-D9250	25.0	192.50	1557.36
SO-SFP-MR120D-50G-D9255	25.5	192.55	1556.96
SO-SFP-MR120D-50G-D9260	26.0	192.60	1556.55
SO-SFP-MR120D-50G-D9265	26.5	192.65	1556.15
SO-SFP-MR120D-50G-D9270	27.0	192.70	1555.75
SO-SFP-MR120D-50G-D9275	27.5	192.75	1555.34
SO-SFP-MR120D-50G-D9280	28.0	192.80	1554.94
SO-SFP-MR120D-50G-D9285	28.5	192.85	1554.54
SO-SFP-MR120D-50G-D9290	29.0	192.90	1554.13
SO-SFP-MR120D-50G-D9295	29.5	192.95	1553.73
SO-SFP-MR120D-50G-D9300	30.0	193.00	1553.33
SO-SFP-MR120D-50G-D9305	30.5	193.05	1552.93
SO-SFP-MR120D-50G-D9310	31.0	193.10	1552.52
SO-SFP-MR120D-50G-D9315	31.5	193.15	1552.12
SO-SFP-MR120D-50G-D9320	32.0	193.20	1551.72
SO-SFP-MR120D-50G-D9325	32.5	193.25	1551.32
SO-SFP-MR120D-50G-D9330	33.0	193.30	1550.92
SO-SFP-MR120D-50G-D9335	33.5	193.35	1550.52
SO-SFP-MR120D-50G-D9340	34.0	193.40	1550.12
SO-SFP-MR120D-50G-D9345	34.5	193.45	1549.72
SO-SFP-MR120D-50G-D9350	35.0	193.50	1549.32
SO-SFP-MR120D-50G-D9355	35.5	193.55	1548.91
SO-SFP-MR120D-50G-D9360	36.0	193.60	1548.51
SO-SFP-MR120D-50G-D9365	36.5	193.65	1548.11
SO-SFP-MR120D-50G-D9370	37.0	193.70	1547.72
SO-SFP-MR120D-50G-D9375	37.5	193.75	1547.32
SO-SFP-MR120D-50G-D9380	38.0	193.80	1546.92
SO-SFP-MR120D-50G-D9385	38.5	193.85	1546.52
SO-SFP-MR120D-50G-D9390	39.0	193.90	1546.12
SO-SFP-MR120D-50G-D9395	39.5	193.95	1545.72
SO-SFP-MR120D-50G-D9400	40.0	194.00	1545.32
SO-SFP-MR120D-50G-D9405	40.5	194.05	1544.92
SO-SFP-MR120D-50G-D9410	41.0	194.10	1544.53
SO-SFP-MR120D-50G-D9415	41.5	194.15	1544.13
SO-SFP-MR120D-50G-D9420	42.0	194.20	1543.73
SO-SFP-MR120D-50G-D9425	42.5	194.25	1543.33

Subject to change without notice.

For more information, visit smaroptics.com.

SO-SFP-MR120D-50G-D9430	43.0	194.30	1542.94
SO-SFP-MR120D-50G-D9435	43.5	194.35	1542.54
SO-SFP-MR120D-50G-D9440	44.0	194.40	1542.14
SO-SFP-MR120D-50G-D9445	44.5	194.45	1541.75
SO-SFP-MR120D-50G-D9450	45.0	194.50	1541.35
SO-SFP-MR120D-50G-D9455	45.5	194.55	1540.95
SO-SFP-MR120D-50G-D9460	46.0	194.60	1540.56
SO-SFP-MR120D-50G-D9465	46.5	194.65	1540.16
SO-SFP-MR120D-50G-D9470	47.0	194.70	1539.77
SO-SFP-MR120D-50G-D9475	47.5	194.75	1539.37
SO-SFP-MR120D-50G-D9480	48.0	194.80	1538.98
SO-SFP-MR120D-50G-D9485	48.5	194.85	1538.58
SO-SFP-MR120D-50G-D9490	49.0	194.90	1538.18
SO-SFP-MR120D-50G-D9495	49.5	194.95	1537.79
SO-SFP-MR120D-50G-D9500	50.0	195.00	1537.40
SO-SFP-MR120D-50G-D9505	50.5	195.05	1537.00
SO-SFP-MR120D-50G-D9510	51.0	195.10	1536.61
SO-SFP-MR120D-50G-D9515	51.5	195.15	1536.22
SO-SFP-MR120D-50G-D9520	52.0	195.20	1535.82
SO-SFP-MR120D-50G-D9525	52.5	195.25	1535.43
SO-SFP-MR120D-50G-D9530	53.0	195.30	1535.04
SO-SFP-MR120D-50G-D9535	53.5	195.35	1534.64
SO-SFP-MR120D-50G-D9540	54.0	195.40	1534.25
SO-SFP-MR120D-50G-D9545	54.5	195.45	1533.86
SO-SFP-MR120D-50G-D9550	55.0	195.50	1533.47
SO-SFP-MR120D-50G-D9555	55.5	195.55	1533.07
SO-SFP-MR120D-50G-D9560	56.0	195.60	1532.68
SO-SFP-MR120D-50G-D9565	56.5	195.65	1532.29
SO-SFP-MR120D-50G-D9570	57.0	195.70	1531.90
SO-SFP-MR120D-50G-D9575	57.5	195.75	1531.51
SO-SFP-MR120D-50G-D9580	58.0	195.80	1531.12
SO-SFP-MR120D-50G-D9585	58.5	195.85	1530.72
SO-SFP-MR120D-50G-D9590	59.0	195.90	1530.33
SO-SFP-MR120D-50G-D9595	59.5	195.95	1529.94